


SITE TRAXX

WALL MOUNTED MONITOR


ASSEMBLY INSTRUCTIONS

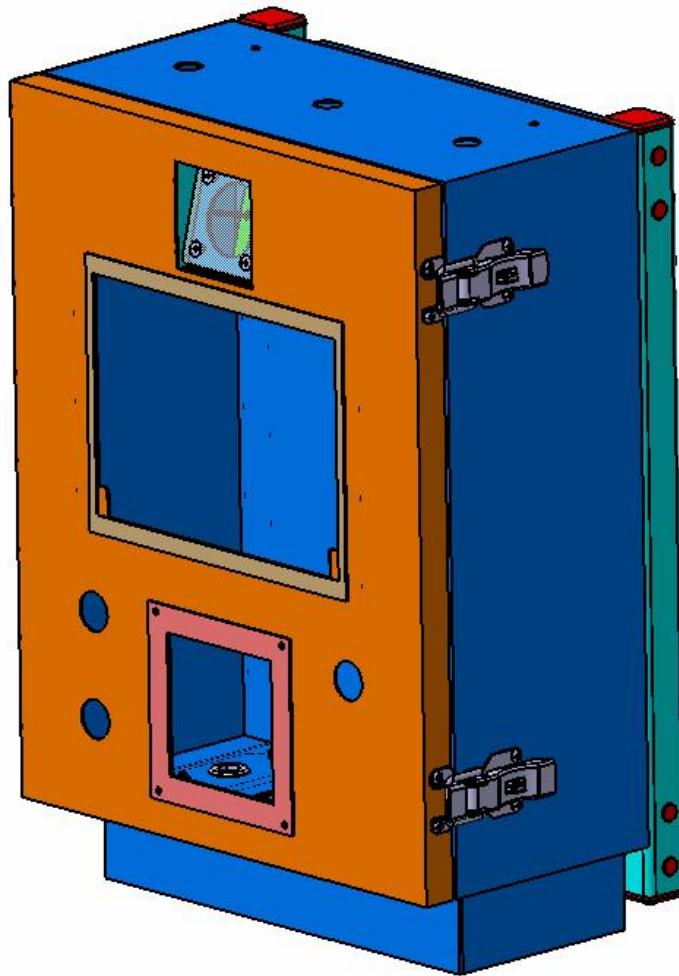


CAUTION ELECTRONIC COMPONENTS

THE SITE TRAXX MONITOR IS INSTALLED ON A VARIETY OF SURFACES, DETERMINE THE AREA AND TYPE OF WALL REQUIRED FOR INSTALLATION OF THE ASSEMBLY THEN CAREFULLY FOLLOW THE DIMENSIONAL REQUIREMENTS PER THESE INSTRUCTIONS. VERIFY THAT THE POWER SUPPLY NEEDED TO CONNECT THE MONITOR ARE IN PLACE AND INSTALLED PER ANY LOCAL, STATE OR CITY CODES REQUIRED.

ELECTRONIC MONITOR ASSEMBLY

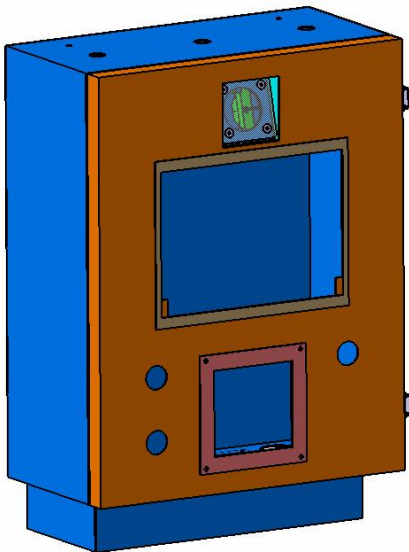


ATTACH FRAME

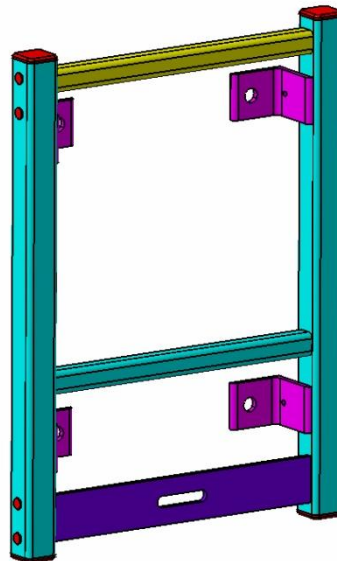

**ATTACH TO STRUCTURE USING CUSTOMER PROVIDED
BOLTS AND WASHERS**

**NOTE: USE 1/4" MINIMUM BOLT AND OVERSIZE
WASHERS TO SECURE, IF THE WALL IS MADE FROM
WOOD VERIFY THAT A PARALLEL CROSS MEMBER HAS
BEEN PROVIDED IN TWO PLACES FOR ATTACHING
FRAME.**

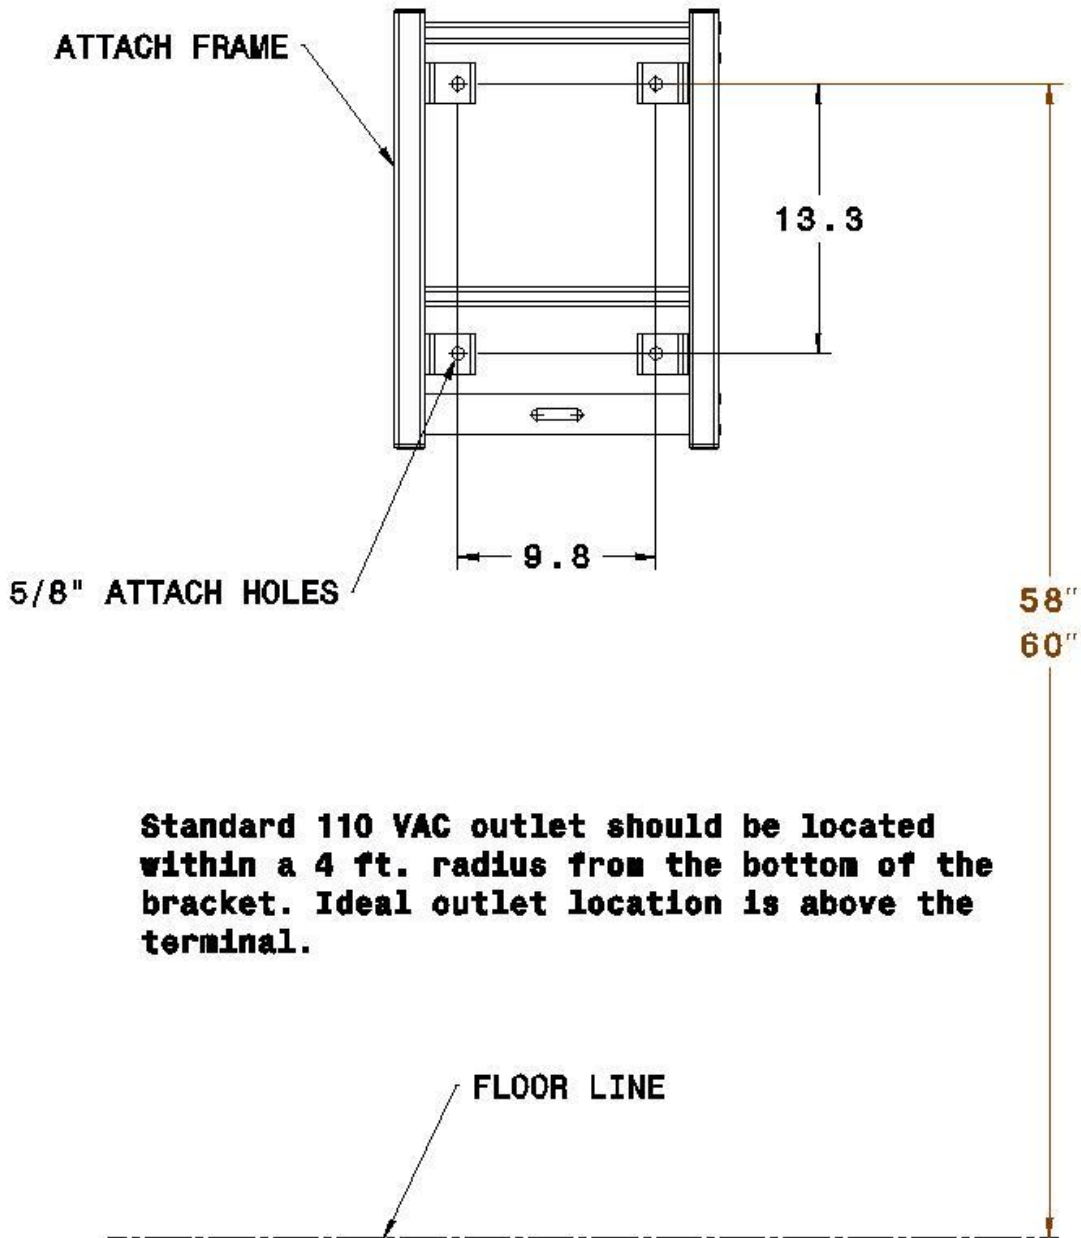

**Standard 110 VAC outlet should be located
within a 4 ft. radius from the bottom of the
bracket. Ideal outlet location is above the
terminal.**